


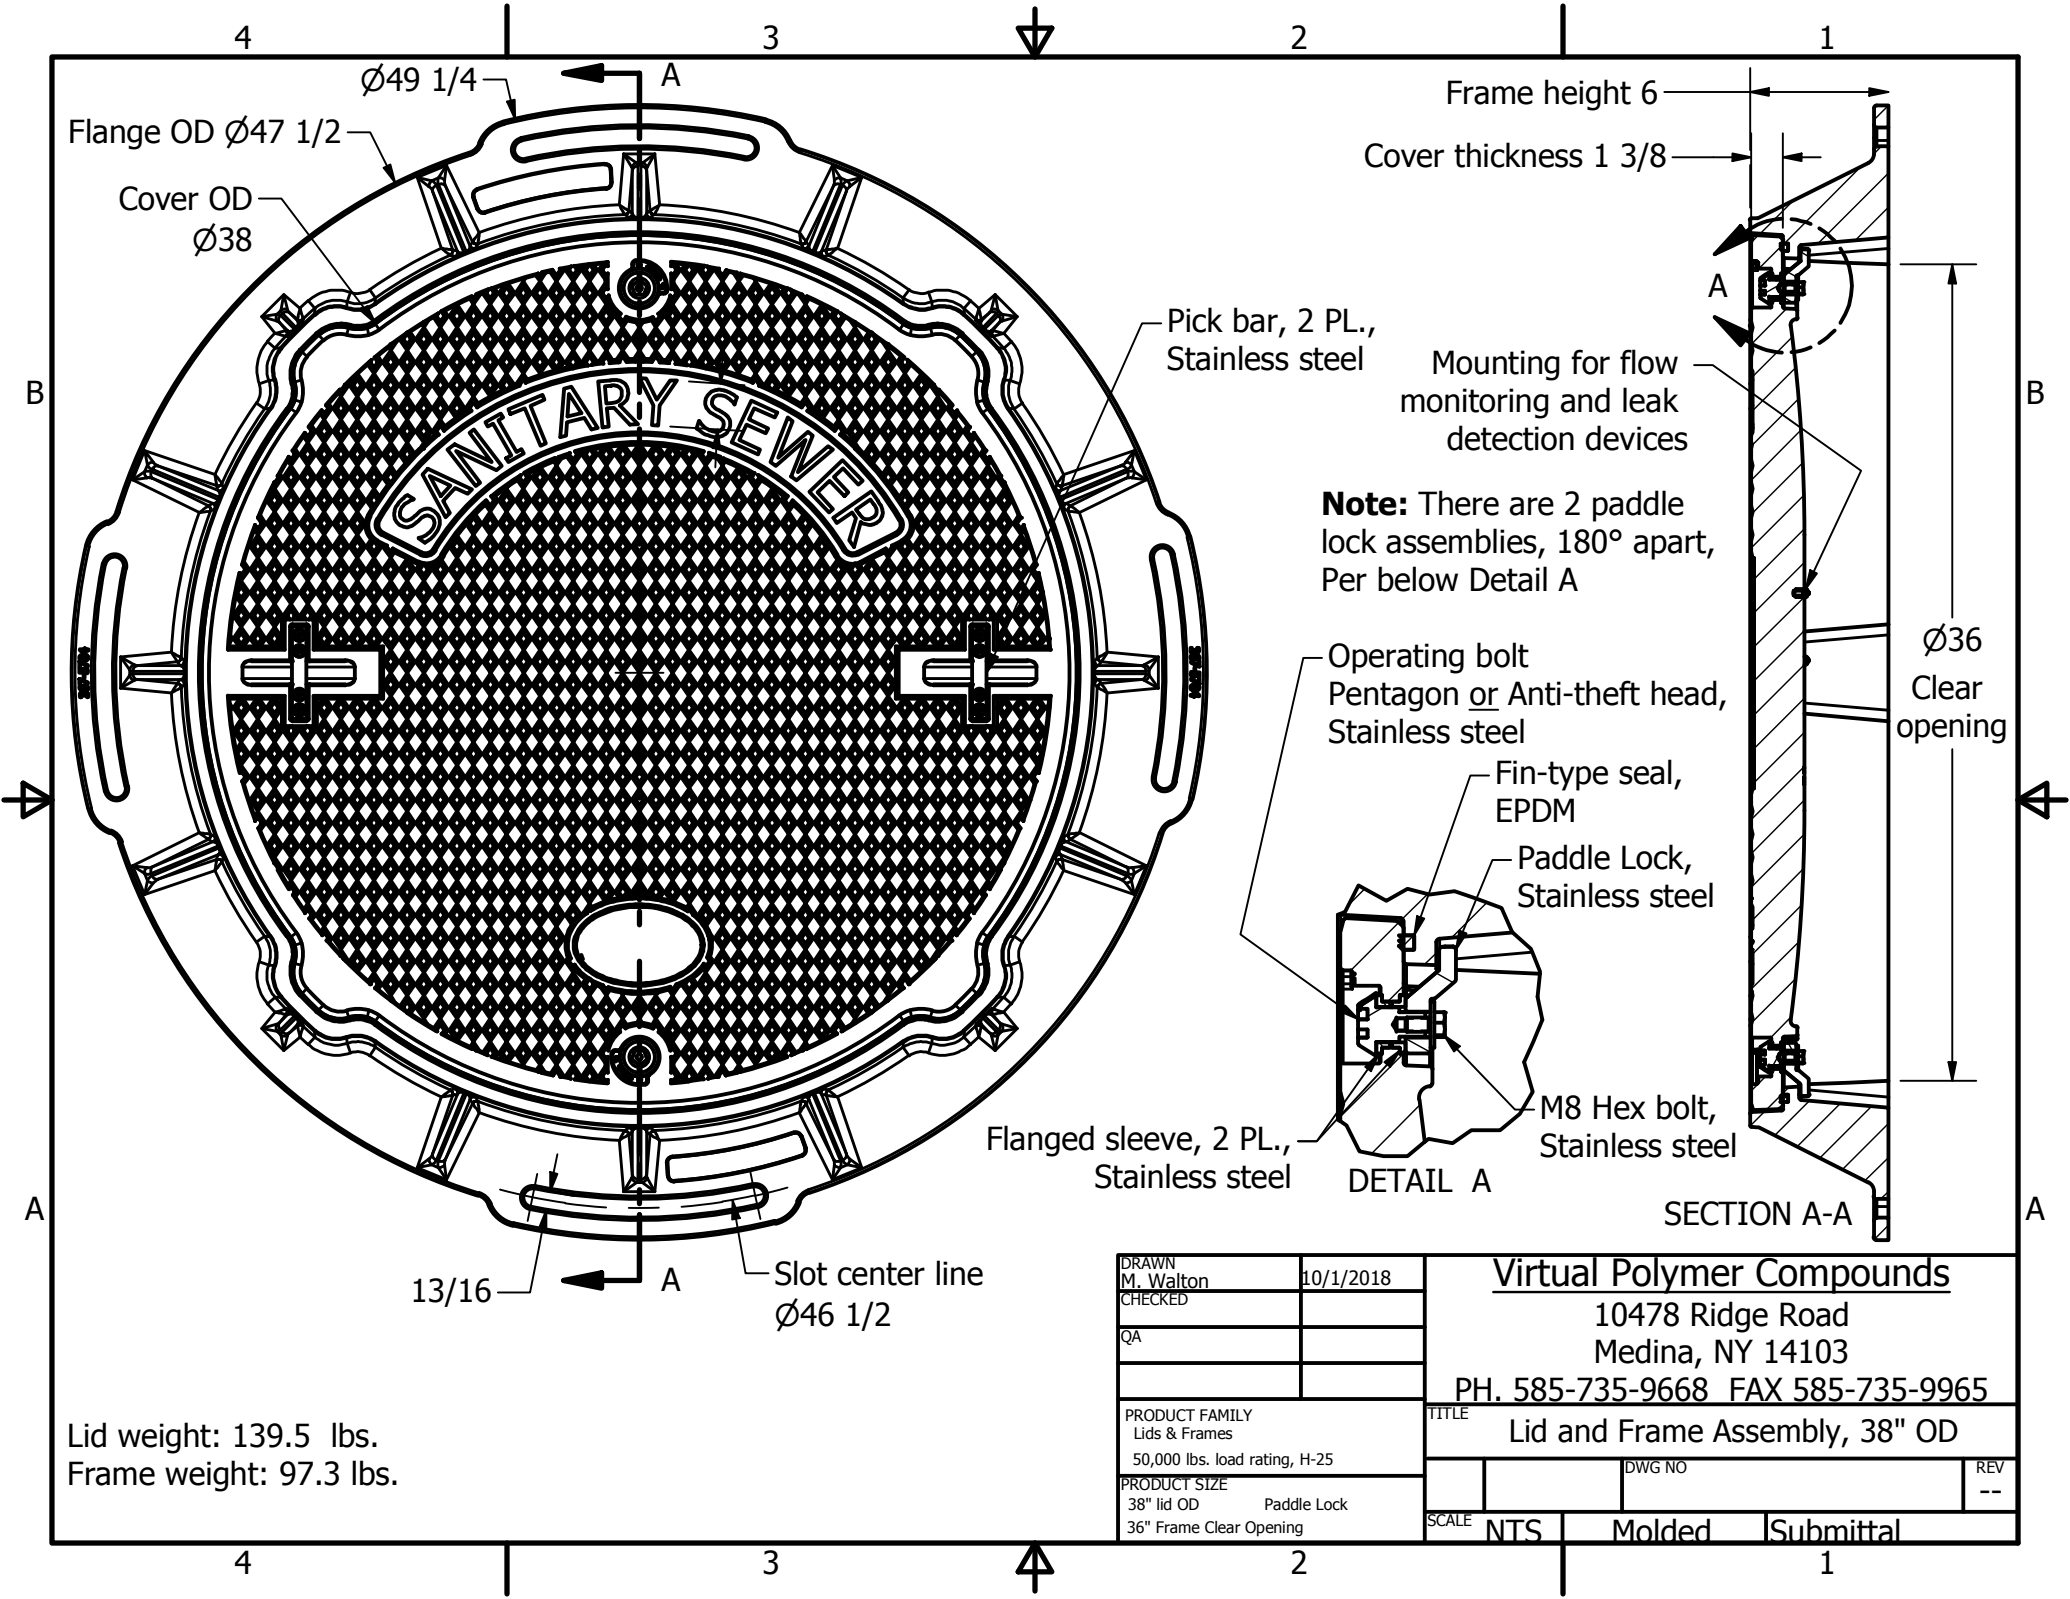

Flange OD $\varnothing 47 \frac{1}{2}$

Cover OD $\varnothing 38$

$\varnothing 49 \frac{1}{4}$

SANITARY SEWER

Pick bar, 2 PL.,
Stainless steel

Frame height 6
Cover thickness $1 \frac{3}{8}$

Mounting for flow
monitoring and leak
detection devices

Note: There are 2 paddle
lock assemblies, 180° apart,
Per below Detail A

Operating bolt
Pentagon or Anti-theft head,
Stainless steel

Fin-type seal,
EPDM

Paddle Lock,
Stainless steel

Flanged sleeve, 2 PL.,
Stainless steel

M8 Hex bolt,
Stainless steel

DETAIL A

SECTION A-A

$\varnothing 36$
Clear opening

13/16

Slot center line
 $\varnothing 46 \frac{1}{2}$

Lid weight: 139.5 lbs.
Frame weight: 97.3 lbs.

DRAWN M. Walton	10/1/2018
CHECKED	
QA	
PRODUCT FAMILY Lids & Frames	
50,000 lbs. load rating, H-25	
PRODUCT SIZE 38" lid OD	Paddle Lock
36" Frame Clear Opening	

Virtual Polymer Compounds			
10478 Ridge Road			
Medina, NY 14103			
PH. 585-735-9668 FAX 585-735-9965			
TITLE Lid and Frame Assembly, 38" OD			
		DWG NO	REV
			--
SCALE	NTS	Molded	Submittal